

EFFICIENT TO SECURE AND MONETIZE NEXT GENERATION NETWORK SERVICES



NATIVE JAVA AND C++ FLEXIBLE MARBEN DIAMX DIAMETER STACKS FOR A QUICK GO-TO-MARKET IN EPC/LTE SERVICES AT LOW RISK AND HIGH RETURNS.

QUICK GO-TO-MARKET – OFFERS COMPLETE DIAMETER CONNECTIVITY AT SMALL INTEGRATION COST.

EASY INTEGRATION

- Two implementations for better integration: Native Java and C++.
- Friendly APIs guaranteed short learning curve.
- Very complete documentation and sample code for quick jump start.

STANDARD AND INTEROPERABLE

- MARBEN Diameter is tested for standard compliance and proven interoperability with industry equipments.

CUSTOMIZABLE AND FUTURE PROOF – FOLLOWS THE STANDARDS AND IS ADAPTIVE TO SPECIFIC CUSTOMER REQUIREMENTS.

FOLLOW STANDARD EVOLUTION

- Marben is committed to follow IMS/LTE and NGN standards and to provide the implementation of the latest versions of these standards.

OPEN AND EXTENSIBLE SOLUTION

- Keeps Diameter standard openness and extensibility by allowing you to dynamically extend Diameter applications commands and AVP set.

CARRIER GRADE READY – ENABLES YOU TO MEET THE REQUIREMENTS OF NEXT GENERATION BROADBAND NETWORKS.

HIGH PERFORMANCE AND CONGESTION MANAGEMENT

- Multi-threaded architecture ready for multi-core, multi-processor architectures. Very efficient message switching ensuring very low latency. Adapted for Diameter load balancer and routing agent.
- Detects congestion and provide alternative route

HIGH AVAILABILITY AND SECURITY

- Extends intrinsic Diameter protocol reliability mechanisms by supporting an active/standby High Availability (HA).
- Secures AAA data with DTLS, TLS and IPsec when offered by the hosting operating system.

TARGET APPLICATIONS

3GPP2 AAA servers,
Policy Decision Function (PDF),
Diameter Proxy, Relay Redirect,
Diameter load balancer,
Home Subscriber Server (HSS),
Application Server (AS),
Online Charging Server (OCS),
Mobility Management Entity, QOS servers

About Marben

A leading provider of key software solutions for next generation service-driven networks.

More than 25 years of experience

Delivers interoperable, robust and efficient signaling, routing and AAA solutions to accelerate the delivery of network services.

Marben Customers

Alcatel-Lucent, Amdocs, Ciena, Cisco, Ericsson, Fujitsu, HP, NEC, Nokia Siemens Networks, Tellabs, Verizon...

TECHNICAL OVERVIEW

MARBEN DiamX Stack offer consists of two products: MARBEN DiamX Stack **Java**, a Diameter stack implemented in **native Java** and MARBEN DiamX Stack **C++**, a Diameter stack written in C++. These products do not make any compromise and are optimized to fully take advantages of customer running environment. They offer a perfect integration in the Java environment or C++.

MARBEN DiamX stacks are packaged as libraries to be embedded into customer's EPC/LTE and IMS software applications. They share the same design concept and provide the identical level of functionality as detailed below.

RICH SET OF INTERFACES

The core of MARBEN Diameter C++ and Java stacks is a robust and high performance implementation of the Diameter base protocol (RFC 6733 and 3588). MARBEN DiamX stacks include the following features:

- Peer transport connection with failover/failback.
- Proxy, Relay and Redirect functions with priority routing.
- Stateless and stateful session management.
- Support of TCP and SCTP, with or without TLS and IPsec.
- Support for High Availability compatible with SAF specifications.
- Client and server role for DBP and all applications.
- Diameter Update Capabilities Application: RFC 6737

On top of the base protocol, MARBEN DiamX stack implements more than **50 Diameter applications**:


The supported applications are NAS, EAP, Sh/Dh, Zh/Zh'/Dz, Zn, S6a/S6d, Cx/Dx, SWx, STa, SWd, SWm, SWx and S6b/H2 for AAA, Rf, SCAP, S13, S7a, S7d, SLg, SLh, SWa, S6c, SGd for offline charging, Ro, Gy, CCA for online charging, Ph, Px for presence, Tx, Gx, Rx, Gq, Gq', e2, e4, S9, Zpn, Gxx, Sd, Sy, Gi, Sgi, S15 for Policy and QoS. Those interfaces cover requirements from IETF, 3GPP all releases, 3GPP2, TISPAN and Ericsson and thus making it the most complete Diameter implementation of the market.

SPECIALIZED APIS AND EXTENSIBLE DIAMETER APPLICATIONS

Each of the supported Diameter application is accessed via a dedicated API for facilitating access to Diameter messages. All these APIs follow the same high-level object and well designed making them easy to learn and to mix with SIP or other signaling protocol in the same application.

The Diameter application commands are stored in XML dictionary. This dictionary is dynamically loadable and extendable to allow service developers to adapt AVP set to specific constraints or requirements.

APIs include primitives for building and parsing the sequence of AVPs in Diameter messages. Parsing is driven by the Diameter command syntax description stored in the XML dictionary and brings adaptability and openness to applications. Specialized APIs give direct access to values of the most important AVPs of Diameter messages.

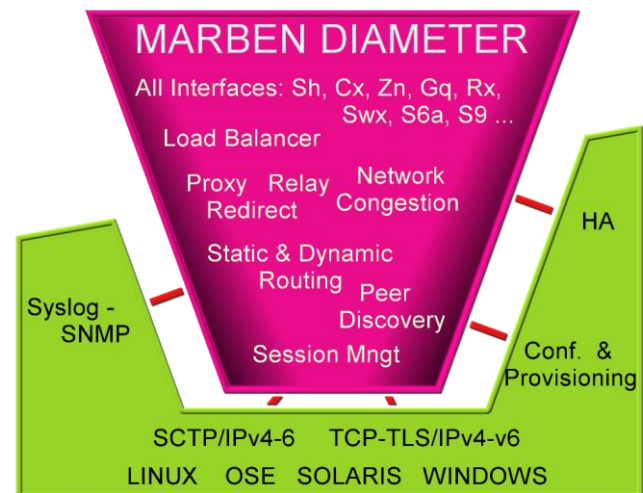

CONTACTS

Marben Products
22 quai Gallieni
92150 Suresnes, FRANCE
Phone : +33 1 7962 1018

NE Technologies Inc.
520 Guthridge Ct, Ste 200
Norcross, GA 30092, USA
Phone : +1 770 709 7238

Sales information:
sales@marben-products.com
www.marben-products.com

CONFORMANCE

Base Protocol: RFC 6733, 3588
Credit Control Application: RFC 4006
NAS and EAP: RFC 4005, RFC 4072
Sh, Dh: 3GPP TS 29.328 and TS 29.329
Cx, Dx: 3GPP TS 29.228 and TS 29.229
Rf, Ro: 3GPP TS 32.299
Gq, Gq': 3GPP TS 29.209 and ETSI ES 183.017
e2, e4 : ETSI ES 283.035 and ETSI ES 283.034
S6a/S6d, S9, S13/13', S7a/S7d: 3GPP TS 29.272
Ph/Px: 3GPP TS 23.141
Zn/Zh/Zh'/Zpn/Dz: 3GPP TS 29.109
Gx/Gxx: 3GPP TS 29.212
Rx: 3GPP TS 29.214
Gy: 3GPP TS 32.240
SCAP: Ericsson 1553-HSD 108 06/1
SWa, STa, SWd, SWm, SWx, S6b/H2: 3GPP TS 29.273
Sy, Sd: 3GPP TS 32.219 and 3GPP TS 32.212
Gi, Sgi: 3GPP TS 29.061
SGd, S6c: 3GPP TS 29.338
SLg, SLh: 3GPP TS 29.172 and 3GPP TS 29.173

www.marben-products.com

SYSTEM REQUIREMENTS

MARBEN C++ Diameter qualifies on:

- RedHat and other Linux on Intel x86 and x86_64,
- Solaris 10 on SPARC and X86_64,
- HP-UX 11iv2 & v3 on PA-RISC and Itanium,
- Windows (On request)

It requires OpenSSL v0.9.8e for TLS support.
MARBEN Java Diameter requires Java RE v1.5 or higher.

It supports IPv4, IPv6, IPsec.

RELATED OFFERS

MARBEN DiamX Gateway,
MARBEN DiamX Router,
Consulting, Training, Turnkey projects.